


PVC
4 1/2"

SINGLE HUNG

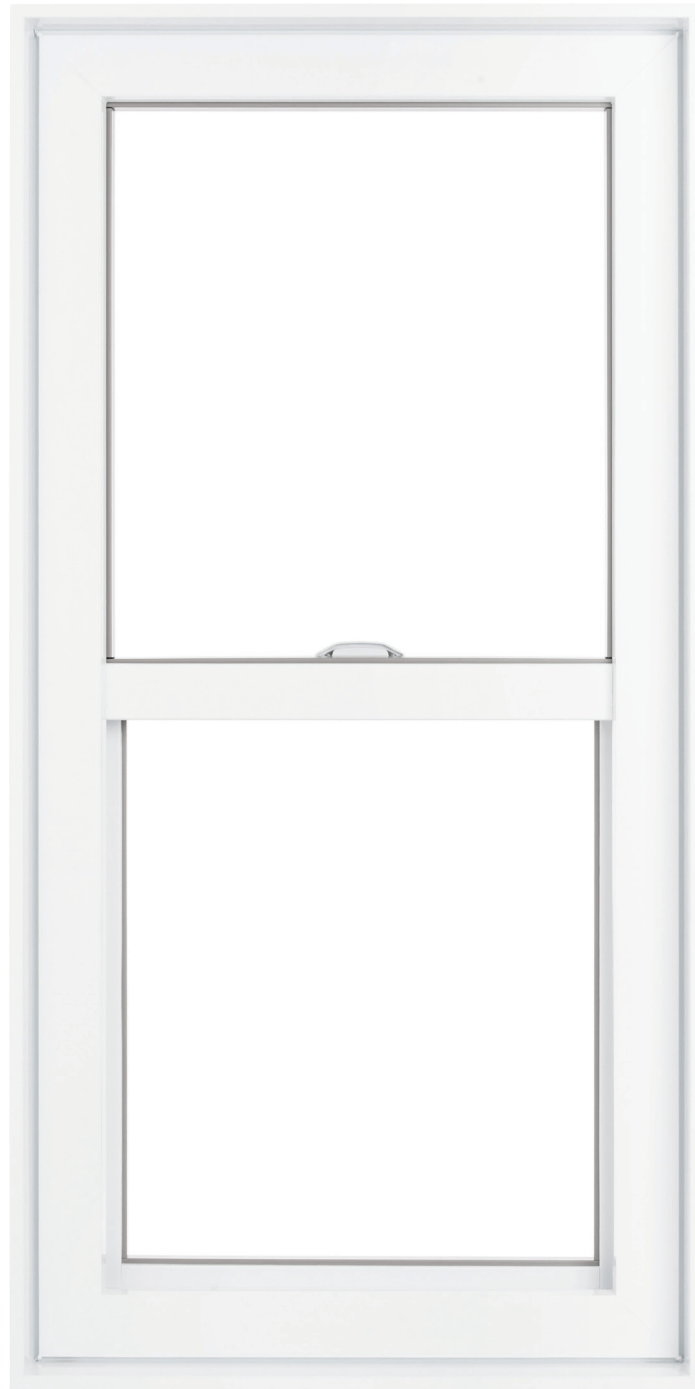

PVC 4 1/2"

SINGLE HUNG

CHARACTERISTICS

1. Multi-chamber welded PVC frame for better insulation.
2. Strong PVC welded sash.
3. 4 1/2" frame positioning the glass in the warmer part of the wall.
4. Virgin PVC extruded profiles provide a glossy finish and facilitate cleaning.
5. Integrated handle on the sash.
6. Sash can be tilted to facilitate cleaning.
7. Matches other products from SONIPLASTICS and DECKO DOORS.



OPTION

- A. Multitude of interior or exterior mouldings.

PERFORMANCES

	NAFS-08	CSA A440-00
Air infiltration/exfiltration:	A3	A3/F
Water resistance:	45/85	B3/B6
Design pressure :	DP60/DP80	C3/C5
Primary designator :	R-PG45 1000 X 1600 (39 X 63) Type H	R-PG80 1000 X 1600 (39 X 63) Type H



COMPATIBLE PRODUCTS



DECKODOORS.COM